

CITY OF PORTSMOUTH
Department of Public Works

Bid #58-09 ATHLETIC FIELD PRESS BOX Addendum #2

July 17, 2009

This Addendum forms part of the original document marked:

Bid #58-09 ATHLETIC FIELD PRESS BOX.

You are directed to make the following changes to the Bid Document:

1. **Page 12, Article 7. ARTICLE III - CONTRACT TIME -**

Delete entire Article and replace with: The work will commence and finish in accordance with the Notice to Proceed and be completed within seventy five (75) days.

2. **Page 15 NOTICE TO PROCEED**

Delete Contract time of forty five days. Replace with:

YOU ARE HEREBY NOTIFIED TO COMMENCE WORK IN ACCORDANCE WITH THE AGREEMENT DATED _____, WITHIN TEN (10) DAYS FROM THE NOTICE TO PROCEED. ALL WORK SHALL BE COMPLETED WITHIN SEVENTY FIVE (75) DAYS OF THIS NOTICE.

3. **TECHNICAL SPECIFICATIONS**

SECTION 024119 - SELECTIVE STRUCTURE DEMOLITION

Delete PART 1 GENERAL Article 1.1. Replace with:

PART 1 - GENERAL

1.1 **SUMMARY**

- A. Remove and dispose of existing pressbox and accessories.
- B. Salvage transformer and electric panel for Owner's use.
- C. Owner will remove and reset public address system.

1.2 **SECTION REQUIREMENTS**

- A. Items indicated to be removed and salvaged remain Owner's property. Remove, clean, and deliver to Owner's designated storage area.
- B. Comply with EPA regulations and hauling and disposal regulations of authorities having jurisdiction.
- C. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.

D. It is not expected that hazardous materials will be encountered in the Work. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Owner. Owner will remove hazardous materials under a separate contract.

4. **DRAWING**

Delete drawing titled Athletic Complex Pressbox dated 5/26/09.


Replace with drawing titled Athletic Complex Pressbox REVISED July 17 2009. (Attached)

All else remains unchanged from original bid document.


Please acknowledge receipt of this addendum within your proposal, failure to do so may subject a bidder to disqualification.

END OF ADDENDUM.

PLAN

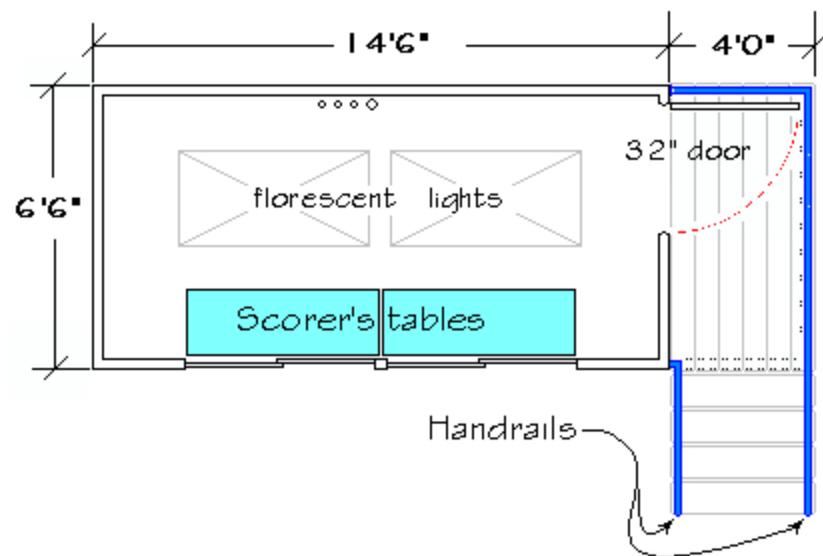

FRONT VIEW

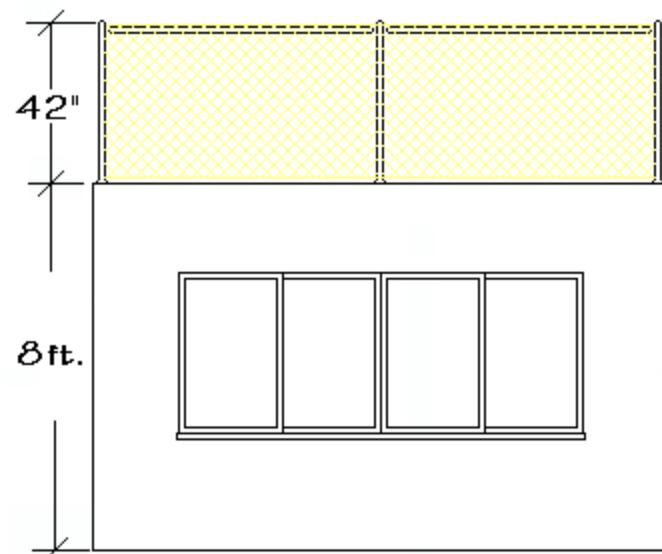

MINIMUM BUILDING REQUIREMENTS

Dimensions: 6'6" W x 14'6" L x 8'0" H

Roof: Camera deck with safety rails and scuttle

Insulation: R-13 Wall Panels; R-19 Ceiling

Entry Door: 32" insulated metal with entrance lockset

Windows: (2) 48"x36" sliding windows w/1/2" Insulated tempered glass

Tables: (2) 48" x 18" laminate top Scorer's tables secured to wall.

Electrical: (3) 11 v GFCI duplex outlets

(2) switched florescent lights

(2) voice and data outlets

Handrail: Provide chain link fall protection at existing entry handrails

NOTE: New pressbox will be supported by existing steel structure

PORTSMOUTH PUBLIC WORKS

ATHLETIC COMPLEX PRESSBOX

Bid No.

58-09

Date

REVISED
07/17/09

Drawn by

DJH